


NVIDIA RTX A2000 MXM 3.1 Type A module

The EMB-G665-B0 MXM 3.1 Type A module features a NVIDIA RTX A2000 embedded graphics processor based on NVIDIA Ampere architecture. It provides graphics intensive acceleration and real time ray-tracing capability for applications like scientific and medical visualization, digital content creation (DCC), artificial intelligence (AI) and machine learning (ML).

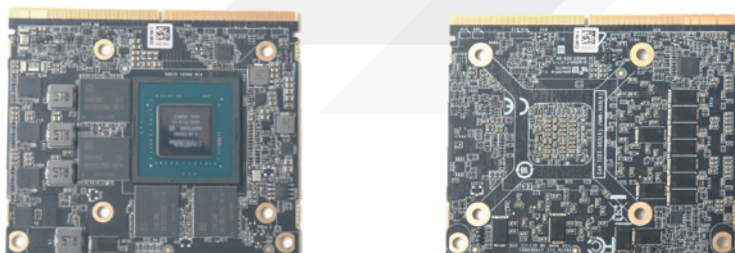

SPECIFICATIONS

GPU model	NVIDIA RTX A2000
SKU	EMB-G665-B0
GPU Product P/N	EN20-P3-A1
GPU architecture	Ampere architecture with 2,560 CUDA cores and 80 Gen3 Tensor cores
GPU/Boost Clock	1,087Mhz, 1,552MHz
Graphics Memory	8 GBytes 128-bit 6 GHz GDDR6
Memory Bandwidth	192 GB/s
ECC function	Support ECC, default disabled, user configurable from Nvidia control panel
Graphics Performance	Max. FP 32 Pref. 8.25TF
Form Factor	MXM 3.1 Type A. 82mm(W) x 70mm(L)
Weight	Approximately 34.8 grams
Host interface	PCI Express 4.0 x8 lanes. Also support x4 lanes
Display output	4x DisplayPort 1.4. Simultaneously 4 output. Max resolution of each port 8K UHD@60Hz (7680 × 4320) Support HDR, HDCP 1.2/1.4 (eDP, LVDS, VGA, USB-C display output are not supported)
BIOS	16Mbit UEFI Serial ROM
Input voltage	DC 12-19V, 3.3V & 5V; +/-5%
Power consumption	Max-Q 50W Total Graphics Power (TGP)
Cooling System	Not included. Custom design available on request
Ambient	Operating: Temperature -10°C ~ +55°C with air flow. Humidity 10% ~ 90%, non-condensing. (Ambient operating temperature range stated above is based on PC Partner's reference cooler. In customer's system the operating temperature range depends on thermal mechanical design.) Storage: Temperature -25°C ~ 80°C. Humidity 10 ~ 90%, non-condensing
Supported API	DirectX 12 Ultimate, Shader Model 7.0, OpenGL 4.6, Vulkan
Supported OS	Windows 10, Windows 11 64-bit, Linux 64-bit
Conformal Coating	None. Available on request
Packing	Non-brand bulk pack
Compliance	RoHS 2
MTBF	Approximately 109, 809 hours at 25°C